


## MB 300 – 20 Single

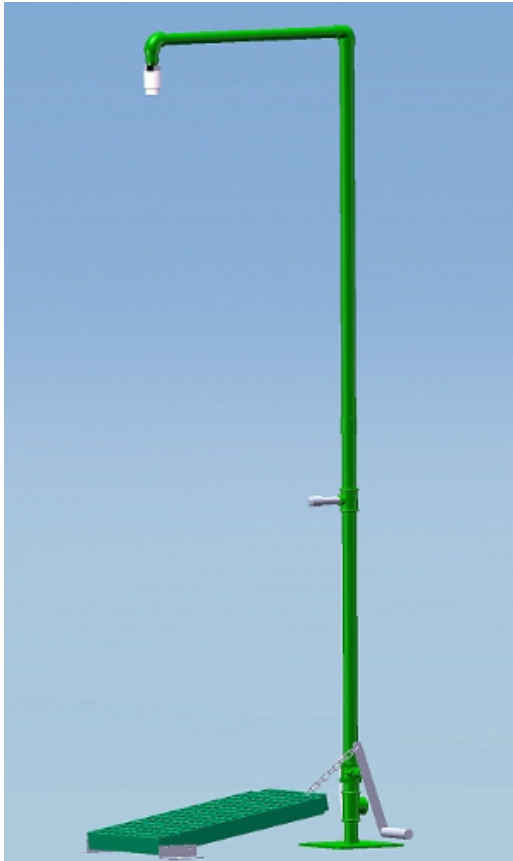

### Description

The MB 300 – 20 Emergency Safety Shower / Body Shower or Drench Shower / Deluge Shower suitable for (tropical) outdoor use, resistant to high temperatures (solar radiation) by means of the self draining principle and has an additional hip / body nozzle / sprayer. The Safety Shower has two water outlets one horizontal sprayer (hip height) and one vertical sprayer (overhead). This model has a 1¼" or 1" BSP standpipe and floor mounting plate. Standard we have a bottom water inlet, but this can be changed to any position you require, in case we install a 3 – way valve (model MB 350 series). Special Shower head (spray angle 60° and gives rotation to the water) for an effective and efficient operation. This Safety Shower (standpipe) drains completely empty after usage this will prevent unacceptable temperature in the standpipe by solar heating. Operation standard by means of foot treadle, but optional possible with panel type foot control. Minimum water pressure is 2 bar.

## Specifications

- water connection: 1¼" or 1" BSP Female or different on your request
- water pressure 2 bar
- Water supply: 60 or 80 liter per minute
- foot operation
- bottom of standpipe can be water supply or drain
- color: different colors
- material: galvanized steel (possible with coating), Stainless Steel, brass, plastic
- Floor mounting plate 230x230 mm, holes 4xø15 mm H.t.H. 180 mm
- meets the following standards: CE EN 15154 & ANSI Z 358.1

## All product options

- proximity switch
- automatic flushing unit
- cabin / booth
- flow regulator
- filters
- light
- sign
- hand shower
- Y-strainer filter
- mixing valve
- eyebath
- chiller
- panel type foot control
- drain sump
- more options on request



Insulindeweg 15  
1462 MJ Middenbeemster  
The Netherlands

[www.matcon.com](http://www.matcon.com)

[info@matcon.com](mailto:info@matcon.com)

+31 (0)299 684468

KvK: Alkmaar 37093381