




## MB 300/80 Emergency Shower Double

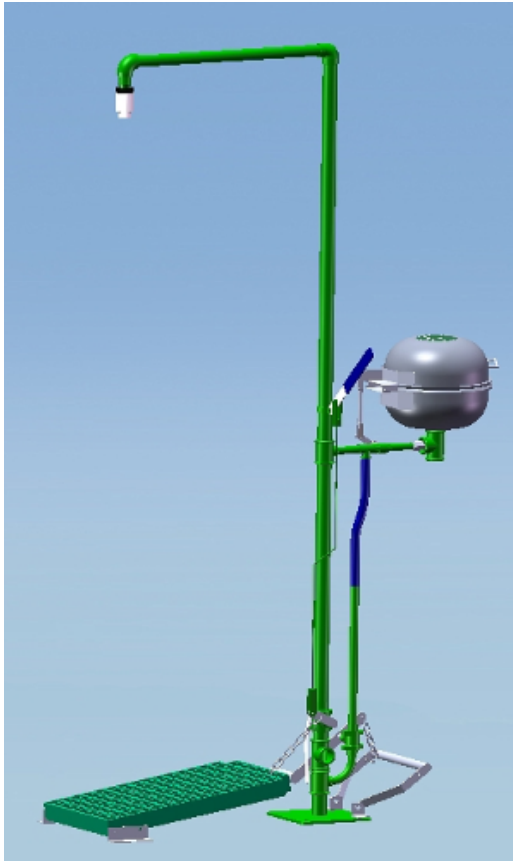

### Description

The MB 300/80 Emergency shower / Safety body Shower or Drench Shower / Deluge Shower suitable for (tropical) outdoor use, resistant to high temperatures (solar radiation) by means of the self draining principle. This model has a 1½" or 1" BSP standpipe and floor mounting plate and is combined with the MB 80 Eyebath / Face Wash Fountain with Stainless Steel bowl and Stainless Steel hinged lid (including sign). The lid is at the same time the operation of the Eyebath (pull backwards up and the water starts running). When the lid is pulled back and closed the eyebath stops automatically. Because of this hinged lid the Eyebath remains clean and hygienic. The Eyebath has diffusers optional supplemented with black rubber eye cups. These diffusers give a gentle aerated soft spray pattern which feels pleasant for the eyes. Standard we have a bottom water inlet, but this can be changed to any position you require, in case we install a 3 – way valve (model MB 350 series). Special Shower head (spray angle 60° and gives rotation to the water) for an effective and efficient operation. This Safety Shower (standpipe), Eyebath drains completely empty after usage this will prevent unacceptable temperature in the standpipe by solar heating. This model comes standard with two self draining valves. The separate operation of the Eyebath by foot treadle. The operation of the Body showers is also by means of a (separate) foot treadle. The operation of the Body shower is also by means of a (separate) foot treadle. The accessing direction of the Emergency Shower and Eyebath as well as their operation will be rotated 90°, 180° or 270° from each other. As an option the operation can also be done by a panel type foot control. Minimum water pressure is 2 bar.

## Specifications

- Water connection: 1¼" or 1" BSP Female or different on your request
- water pressure 2 bar
- Body Shower water supply: 60 or 80 liter per minute
- Eyebath water supply: 12 liter per minute
- foot operation
- bottom of standpipe can be water supply or drain
- color: different colors
- material: galvanized steel (possible with coating), Stainless Steel, brass, plastic
- Floor mounting plate 230x230 mm, holes 4xø15 mm H.t.H. 180 mm
- this emergency-shower(s) meets the following standards: CE EN 15154 & ANSI Z 358.1

## All product options

- proximity switch
- automatic flushing unit
- cabin / booth
- flow regulator
- filters
- light
- sign
- hand shower
- black rubber eye cups
- Y-strainer filter
- mixing valve
- extra hip / body nozzle
- chiller
- panel type foot control
- drain sump
- more emergencyshower options on request



Insulindeweg 15  
1462 MJ Middenbeemster  
The Netherlands

[www.matcon.com](http://www.matcon.com)

[info@matcon.com](mailto:info@matcon.com)

+31 (0)299 684468

KvK: Alkmaar 37093381